


WALL TYPE: Internal wall




**Bespoke Modular
Developments**

Thermal conductivity and thermal resistance are BS EN 12664, BS EN 12667 & BS EN 12939

Typical party wall

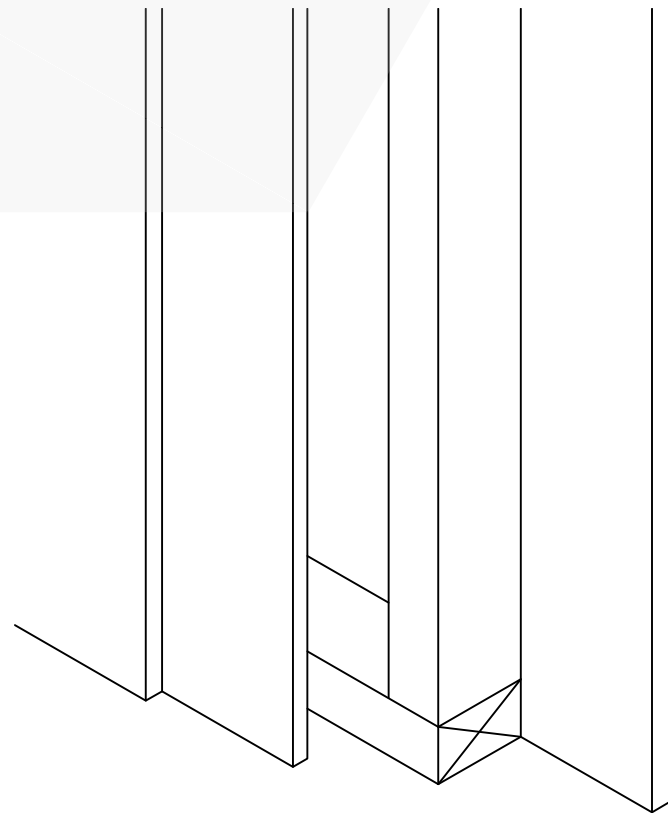

Typical party wall manufacturing drawing

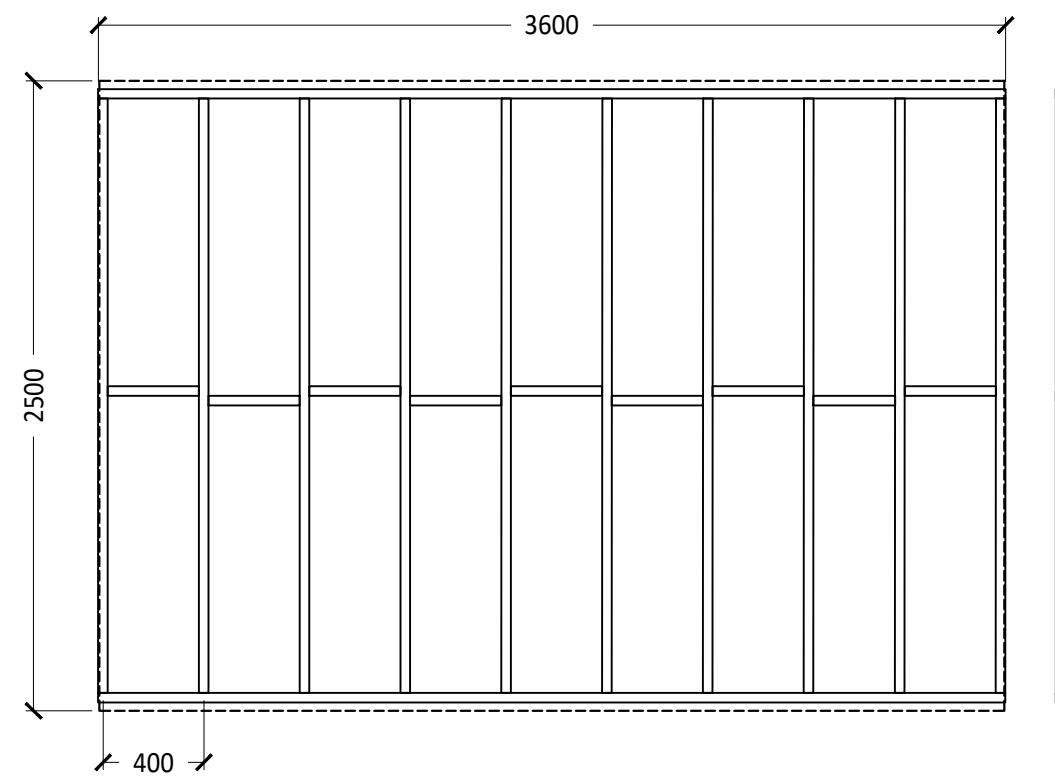

Typical intermediate floor build up: 105mm

- 12.5mm Wall board & 3mm skim (0.19 W/mk)
- C16 CLS (Canadian lumber standard timber) 63x38mm timber frame, studs 400mm centres
- 60mm Mineral wool insulation to cavity (0.044 W/mk)
- 11mm OSB structural board (0.13 W/mk)
- 12.5mm Wall board & 3mm skim (0.19 W/mk)

*Note:

Internal wall timber size may vary depending on depth of wall required